


SINGLE-AXLE TRAILERS



Our Single and Dual-Axle Trailer units are fully integrated and self-contained systems that are designed with a large supply tank for working at remote sites where water is not accessible. Customize to fit your application needs with a high quality pressure washer to get large jobs done quickly wherever you may need to work.

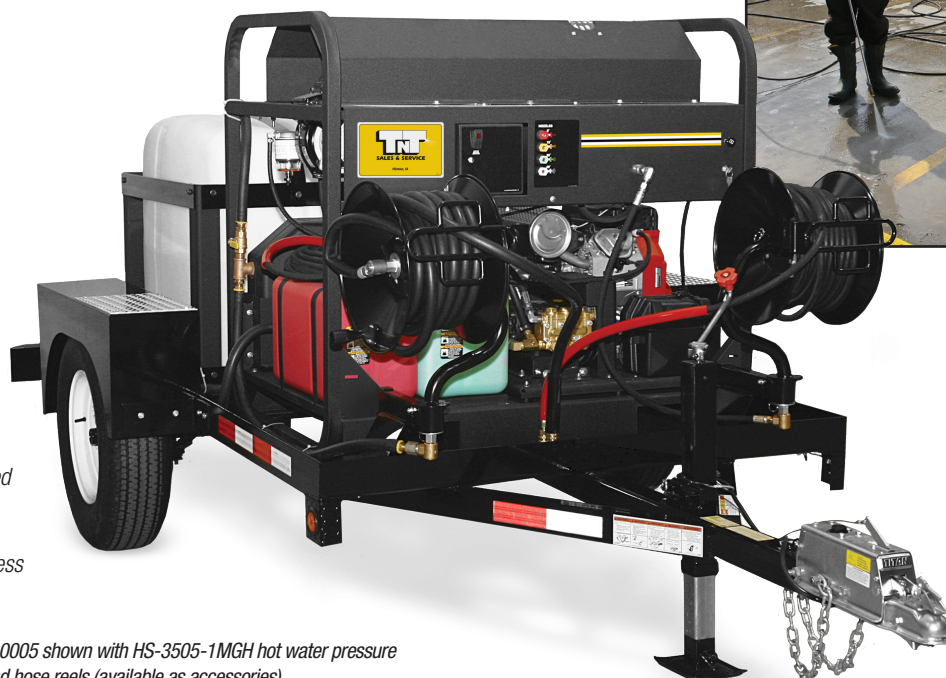

Features

- Swivel jack with pad
- Rubber mounted sealed lights
- Tank is enclosed in a powder coated steel frame
- Will fit all pressure washers
- Aluminum treadplate steps for access to water tank

Accessories

- Pressure washers
 - Hose reels
- AW-9000-0005 shown with HS-3505-1MGH hot water pressure washer and hose reels (available as accessories)*

MODEL NUMBER	WATER TANK	BRAKES	COUPLER	TIRES	AXLES	TRAILER DECK PLATE	ANGLE FRAME	TRAILER BED DIM.	GROSS VEHICLE WT.
AW-9000-0005	200-gallon	Surge	2in.	(2) ST205-75R 15-in. radial	(1) 3,500 lb.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	3,500 lb.
AW-9000-0006	200-gallon	Electric	2in.	(2) ST205-75R 15-in. radial	(1) 3,500 lb.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	3,500 lb.
AW-9000-0007	200-gallon	None	2in.	(2) ST205-75R 15-in. radial	(1) 3,500 lb.	.25in. solid steel	3in.x4.25in.	5ft.x8.5ft.	3,500 lb.

Trailer Options for Single & Dual-Axle Trailers

High Pressure Hose Reel Options

These high pressure hose reel options include a hose reel with jumper hose and mounting bracket.

TX-0001 (13-inch reel)

TX-0002 (16-inch reel)

Low Pressure Hose Reel Option

This low pressure hose reel option includes a hose reel with mounting bracket and plumbing.

TX-0003 (16-inch reel)

Note: 22-0136 back-flow preventor must be used with TX-0003, when used in California.

Back-Flow Preventor

This back-flow preventor is required on trailer units in some states.

22-0136

- Use if a trailer has a hose reel for the supply
- Mounts on inlet side of trailer
- To be used with TX-0003 low pressure hose reel option

Trailer Tank Bypass

TX-0005 (Dual-axle trailer tank bypass, for use with HS Series)

TX-0007 (Single-axle trailer tank bypass, for use with HS Series)

- Removes the float system, while adding the necessary plumbing
- Water bypasses back to water tank

Replacement Hose Reel Parts

When adding hose reels to the single or dual-axle trailers, use the following jumper hose and mounting bracket.

15-0159 (Jumper hose)

13-0179A01 (Mounting bracket)

50-0195 (13-inch hose reel, 150-foot maximum hose length)

50-0196 (16-inch hose reel, 200-foot maximum hose length)

Trailer Hitches

This specially designed heavy-duty, 2-inch trailer hitch has a pin-style securing mechanism and hinged ball socket with visual indication of proper closure around the ball - all to ensure a quick, easy and secure hook-up. Includes hitch with brackets and hardware.

TX-0009 (For use with single-axle trailers)

TX-0010 (For use with dual-axle trailers)