


DEALER COLD WATER PRESSURE WASHERS

Premium Series

Gasoline | Portable with Roll Cage | Belt Drive

One of the most durable cold water pressure washers on the market today, this Premium Series is equipped with a durable roll cage. It is perfect for industrial jobsites where heavy-duty cleaning is needed.

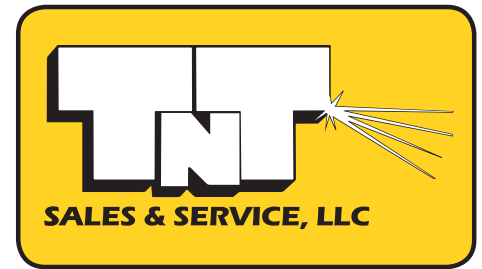

DC-5004-WC4H6A

Pump

- Belt drive triplex piston AR or General pump with ceramic plungers
- External bypass system allows more water into the system to protect from heat build-up
- Forged brass manifold
- Thermal and safety relief valves
- Water filter with clear sleeve for screen inspection (High capacity water filter on DC-3008-WC4H6G)
- Stainless-steel and brass unloader with preset pressure

Frame

- Powder coated steel frame with 1¼-inch roll cage, handles and lifting hook
- 13-inch flat-free tires and locking brake

Engine

- Performance-proven Honda OHV engine with low-oil shutdown

Components

- Fuel tank has powder coated outside and aluminized steel inside to prevent rusting
- 13-gallon fuel tank capacity for 9½ hour run time

Unit Includes:

- Quick connect nozzles – 0°, 15°, 25° and 40°
- 50-foot x ¾-inch high pressure hose with quick connects, swivel and bend restrictors (DC-5000 models have a non-marking hose) (DC-6004 and DC-7004 models have a black hose)
- 50-foot x ½-inch high pressure black hose with quick connects (DC-3008-WC4H6G)
- Insulated trigger gun with safety lock-off
- 48-inch lance with rubber grip




DC-5004-WC4H6A
DC-5004-WC4H6G
DC-5005-WC4H6G

DEALER COLD WATER PRESSURE WASHERS

Premium Series

Gasoline | Portable with Roll Cage | Belt Drive

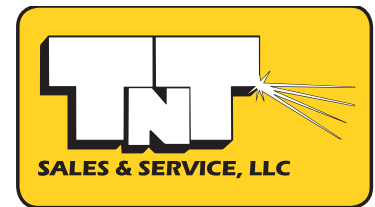

Model Number	PSI	GPM	Displacement/Engine	Pump	Unloader	Lance	Dimensions (LxWxH)	Ship Wt.	Net Wt.
DC-3008-WC4H6G	3000	8.0	688cc Honda GX630 OHV, electric start – Battery included	General	Factory preset	48in.	43x27.75x36in.	531 lb.	408 lb.
DC-5004-WC4H6A	5000	4.0	688cc Honda GX630 OHV, electric start – Battery included	AR	Factory preset	48in.	43x27.75x36in.	521 lb.	398 lb.
DC-5004-WC4H6G	5000	4.0	688cc Honda GX630 OHV, electric start – Battery included	General	Factory preset	48in.	43x27.75x36in.	521 lb.	398 lb.
DC-5005-WC4H6G	5000	5.0	688cc Honda GX630 OHV, electric start – Battery included	General	Factory preset	48in.	43x27.75x36in.	531 lb.	408 lb.
DC-6004-WC4H6G	6000	3.7	688cc Honda GX630 OHV, electric start – Battery included	General	Factory preset	48in.	43x27.75x36in.	531 lb.	408 lb.
DC-7004-WC4H6G	7000	3.8	688cc Honda GX690 OHV, electric start – Battery included	General	Factory preset	48in.	43.25x28.5x39.25in.	521 lb.	398 lb.

Accessories:		
Part Number	Description	Fits Models
851-0089	50-ft. x ½-in. high pressure hose - For when you need extra hose for added mobility	DC-3008-WC4H6G
851-0317	50-ft. x ¾-in. non-marking hose - For when you need extra hose for added mobility	DC-5004, DC-5005 & DC-6004 models
851-0420	50-ft. x ¾-in. high pressure hose - For when you need extra hose for added mobility	DC-7004-WC4H6G
AW-0018-0375	Rotating nozzle - Increase your cleaning power and decrease your cleaning time, 0° spray with 25° coverage	DC-7004-WC4H6G
AW-7500-0035	Rotating nozzle - Increase your cleaning power and decrease your cleaning time, 0° spray with 25° coverage	DC-5004 & DC-6004 models

POWERED by **HONDA**™